



# PAN/TILT IR BULLET CAMERA WITH MOTORIZED VF LENS

I5PT-390IPX10-P  
I5PT-390IPX4-P



## Main Features:

- ONVIF
- PoE Support
- Dual Video Stream
- H.264 Video Compression
- 50m IR Distance
- Preset speed of 12°/Sec (max)
- Preset accuracy up to 0.1°
- 250° Pan Rotation
- 65° Continuous Tilt
- 256 Preset Position
- Park Action (Preset)
- Fully function web-client
- 3D-DNR Noise Reduction
- Digital WDR
- IP66 Water-proof and Dust-proof
- Excellent High Resolution Picture Quality
- True Day/Night with ICR Filter
- Enhanced Noise Reduction
- WB/BLC/AGC

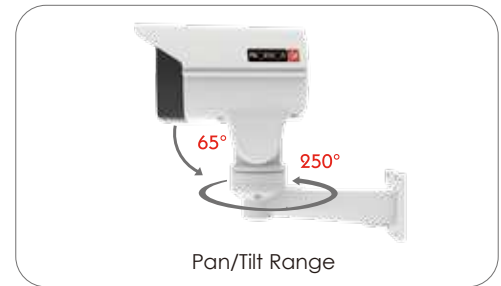

## Specifications

|                   |                          | I5PT-390IPX10-P  | I5PT-390IPX4-P   |
|-------------------|--------------------------|--|--|
| Camera            | Video                    | Model  | I5PT-390IPX10-P  |
|                   |                          | Image Sensor   | 1/2.9" CMOS  |
|                   |                          | Effective Pixels   | 1920×1080  |
|                   |                          | Sync System  | Progressive Scan   |
|                   |                          | Electronic Shutter   | 1/25s ~ 1/10000s   |
|                   |                          | Day & Night  | ICR (Auto/Day/Night)   |
|                   | Lens                     | Min. Illumination  | 0.05 Lux (Color), 0.01 Lux (B&W), 0 Lux (IR On)  |
|                   |                          | S/N Ratio  | >52dB  |
|                   |                          | Optical Zoom   | x10 (5.1-51mm)   x4 (2.8-12mm)   |
|                   |                          | Digital Zoom   | No   |
| Audio             | Focus                    | Auto / Manual  |  |
|                   | Minimum Focus Distance   | 1.5m   |  |
| Image Enhancement | Horizontal Angle of View | H: 50.4°(Wide) to 5.4°(Tele)   81.2°(Wide) to 22.6°(Tele)              |  |
|                   | Audio compression        | No   |  |
|                   | Communication            | No   |  |
|                   | Image Settings           | Image Settings   | AWB Adjustable<br>Exposure Mode<br>Sharpness, Saturation, Brightness & Contrast Adjustable<br>Auto Gain Adjustable |
|                   |                          | BLC  | Yes  |
|                   |                          | Sense-Up   | Yes (5 Levels)   |
|                   |                          | WDR Range  | Digital WDR  |
|                   |                          | Noise Reduction  | 3D-DNR   |
|                   |                          | Image Orientation  | Mirror/Flip  |
|                   |                          | Privacy Zone   | Yes  |
| Motion Detection  | Yes                      |  |  |
| Compression       | Video Compression        | H.264 Main Profile<br>MJPEG/JPEG Baseline                              |  |
|                   | Resolution               | Main Stream: 1080P, 720P<br>Sub-Stream: D1, CIF                        |  |
|                   | Multi-stream             | 1920x1280 (1~30fps) 1280x720 (1~30fps)<br>D1 (1~30fps) / CIF (1~30fps) |  |
|                   | Bit rate                 | 64Kbps ~ 8Mbps   |  |
|                   | Encode Mode              | VBR/CBR  |  |
|                   | Image Quality            | Six levels under VBR; Free adjustment under CBR                        |  |

|                  |                               |  |
|------------------|-------------------------------|--|
| Network          | Remote Monitoring             | IE Browsing, CMS 3.x Control Software  |
|                  | User Access                   | Supports simultaneous monitoring for up to 4 users with multi-stream real time transmission  |
|                  | Network Protocol              | TCP/IP, UDP, DHCP, NTP, RTP, RTSP, UPnP, SNMP, PPPoE, DNS, DDNS, SMTP, FTP, HTTP, IPv4, IPv6 |
|                  | ONVIF                         | Yes  |
| Pan/Tilt         | Ethernet                      | 100Mbps  |
|                  | PoE                           | Yes  |
|                  | Pan/Tilt Range                | 250° Pan / 65° Tilt  |
|                  | Pan/Tilt Speed                | Max Preset Speed: 12°/s<br>Manual: 0.5°~12°/Sec (Proportional to Zoom)                       |
| Housing          | Presets                       | 255  |
|                  | Patterns                      | No   |
|                  | Cruise                        | No   |
|                  | Scan                          | No   |
| Connectivity     | Schedule                      | No   |
|                  | IR Distance                   | 50m  |
|                  | Water-proof                   | IP66   |
|                  | Wiper                         | No   |
| Others           | Fan & Heater                  | No   |
|                  | Bracket                       | Wall Bracket   |
|                  | Dimensions                    | 225*175*94mm   |
|                  | Weight(gross)                 | 920gr  |
|                  | Network                       | RJ45 (+PoE)  |
|                  | Power                         | DC Socket  |
| Others           | Analog Video Output           | No   |
|                  | Audio Connectivity            | No   |
|                  | SD Card                       | No   |
|                  | RS485                         | No   |
| Others           | Alarm                         | No   |
|                  | Power Supply                  | 12VDC/2A (Not supplied)  |
| Work Environment | -20 C ~50 C, 10%~90% Humidity |  |