


40M IR MVF LENS VANDAL PROOF DOME CAMERA

DAI-340IPE-MVF

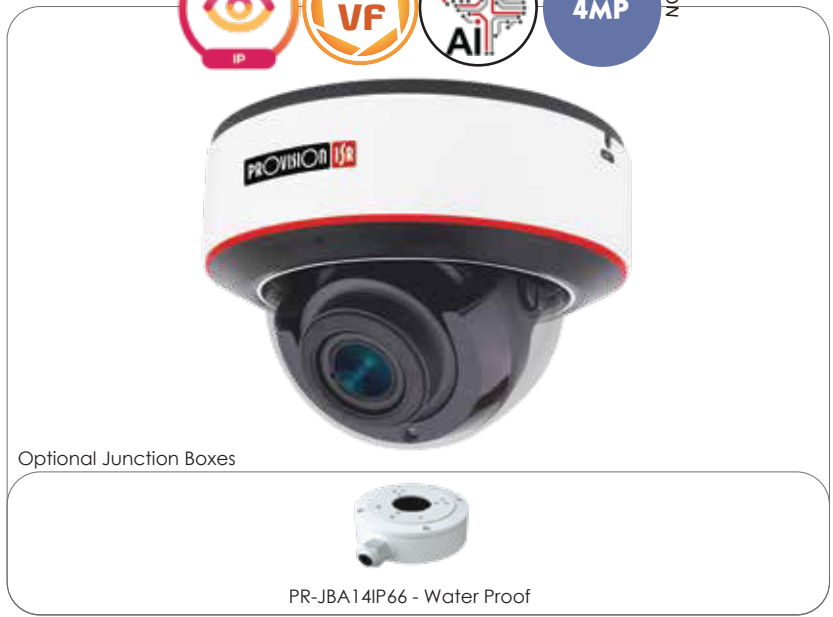

1/2.8" CMOS Sensor
2 Mega-Pixel
True Day & Night (IR Cut Removable)
H.265 (HEVC) Compression
0 Lux (IR On) Min. Illumination

ONVIF
True WDR
3D Noise Reduction
Motion Detection and Privacy Masking
AI Analytics (DDA + Face Detection)

Built-in Microphone
Audio Input + Output
Alarm Input + Output
2.8-12mm Motorized VF Lens
40m IR Illumination

PoE Support
IP 67 / IK10 Protection
Micro SD Card Support
Technician Port

Specifications

Camera	Video	Model	DAI-340IPE-MVF
		Image Sensor	1/3" CMOS (16:9)
		Effective Pixels	2592X1520
		Electronic Shutter	1/25s ~ 1/100000s
		Frame Rate	1-25/30FPS In Normal Mode. 1-50/60FPS in HFR Mode***
		Day & Night	ICR
	Audio	Min. Illumination	Day: 0.1lux / Night: 0.005lux (@F1.6, AGC On) 0lux with IR on
		Audio compression	G.711A/G.711U
	Image Processing	Communication	Two-way Audio
		Image Settings	AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
		Image Enhancement	True WDR (120dB), BLC, HLC, ROI
		Noise Reduction	3D-DNR
		Image Orientation	Mirror/Flip
		Privacy Zone	Yes
		Motion Detection	Yes
Compression	Analytics	Object Detection (Sterile Area, Line Crossing, Object Counting), Face Detection (10 Faces per frame), Camera Tampering	
	Video Compression	H.265S/H.264S*, H.265+/H.264+/H.265/H.264/MJPEG**	
	Resolution	4MP / 2K / 3MP / 2MP / 1MP / D1 / QVGA / CIF	
	Multi-Stream	Master Stream: 4MP(2592x1520) / 2K (2560x1440) / 3MP / 2MP / 1MP Sub-Stream: 1MP/QVGA/D1/CIF Third Stream: QVGA/D1/CIF (1~30fps)	
	Bit rate	64Kbps ~ 7Mbps@H.265 / 64Kbps ~ 8Mbps@H.264	
	Encode Mode	VBR/CBR	
	Image Quality	Five levels under VBR; Free adjustment under CBR	

Housing	IR Distance	40m (2 High Power IR LED)
	Lens (Field of View)	2.8-12mm MVF with Auto Focus (94.3°-29.9°)
	Iris	DC Iris
	Lens Mount	Ø14 Mount
	Protection Rate	Water Proof: IP67, Vandal Proof: IK10
	Bracket	3-Axis Bracket
Connectivity	Dimensions	Ø140.9x100.3mm
	Weight(gross)	~890g
	Network	RJ45 (+PoE)
	Power	DC Socket
	Analog Video Output	CVBS Out + Technician Port
	Audio Connectivity	Built-in Microphone + Audio Input + Audio Output
Network	SD Card	Event/Schedule based Main/Sub-Stream recording (Up to 128Gb)
	Hard Reset Button	Yes
	Alarm	Alarm in + Alarm Out
	Remote Monitoring	IE Browsing, CMS Software, Provision Cam2 Mobile App
	User Access	Supports simultaneous monitoring for up to 10 users with multi-stream real time transmission
	Network Protocol	IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS, P2P
Others	ONVIF	Yes
	Ethernet	100Mbps
	PoE	Yes
	Power Supply	DC12V/~780mA / PoE/~7.4W
	Work Environment	-30°C~60°C, 10%~90% Humidity

*Main Stream Only, **Sub-Streams Only, ***1080P, No True-WDR

