


# HD ANALOG 40 IR MOTORIZED VF BULLET CAMERA

I4-39AU-MVF

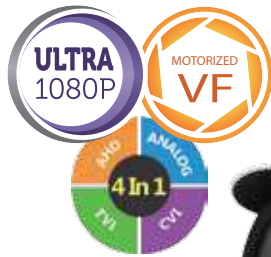



MODEL	I4-390AU-MVF
Image Sensor	1/3" CMOS
Image Format	16:9
Effective Pixels	1984(H)×1105(V)
Scanning System	Progressive
Resolution	Digital:1920x1080 + Analog:960H
Min. Illumination	0.001Lux (0 Lux with IR on)
Day & Night	True Day&Night (ICR)
IR LED	4 LED Array (40m)
OSD Menu	Available
CoC Support	Yes
Day & Night Mode	EXT, Color, B&W, Auto
Backlight Compensation	Off/BLC/HLC/True WDR (120dB - Digital Output Only)
S/N Ratio	≥60dB (AGC Off)
White Balance	Auto, Manual, Auto-Push
Noise Reduce	3D-DNR For AHD / CVI / TVI, 2D-DNR For CVBS
Video Output	AHD / CVI / TVI / CVBS + PAL / NTSC (Signal Selectable via DIP Switch on cable)
Defog	Off/On
Privacy Mask	On/Off (4 Areas)
Motion Detection	On/Off (4 Areas)
D-Effect	Freeze, Mirror, Negative Image
Lens (Field of View)	2.8-12mm Motorized with Auto-Focus (90°-27°)
Power	DC12V±10%, ~480mA
Operation Temp.	-30°C~+50°C
Waterproof	IP66
Dimension	286*77*85.6mm
Net weight	836g

## Main Features:

- Sensor: 1/3", 2 Mega-Pixel
- Dual Video Output: 1080P AHD / CVI / TVI + Analog
- Lens: 2.8-12mm Motorized with Auto Focus
- True Day & Night – ICR
- True WDR (Digital Output Only)
- IR Range: 40m (4 Array LED)
- IP66
- CoC Support
- Weight: 836g
- Power: DC 12V, ~480mA



Junction Box (PR-B47JB) is available

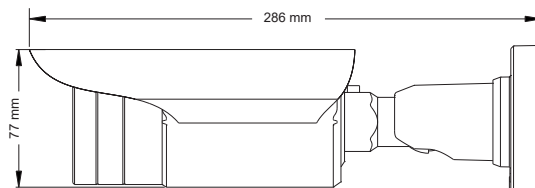

DIP Switch for Output Selection